


矩形直波导

直波导是组成波导馈线系统的基本元件，其中矩形直波导应用最广（最常见）。

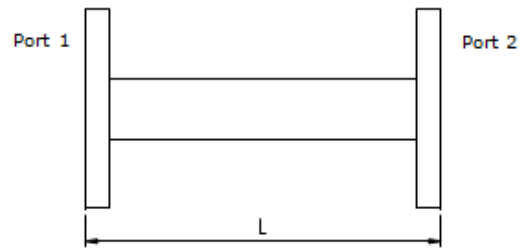

矩形直波导典型产品

产品型号	频率范围 (GHz)	VSWR	长度范围 (mm)	法兰 1	法兰 2
WGCS01-0003FDP-xxxx-xxx	0.32-0.49	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0004FDP-xxxx-xxx	0.35-0.53	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0005FDP-xxxx-xxx	0.41-0.62	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0006FDP-xxxx-xxx	0.49-0.75	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0008FDP-xxxx-xxx	0.64-0.98	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0009FDP-xxxx-xxx	0.76-1.15	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0012FDP-xxxx-xxx	0.96-1.46	≤ 1.05	0.2-500	FDP	FDP
WGCS01-0014FDP-xxxx-xxx	1.13-1.73	≤ 1.05	0.2-2000	FDP	FDP
WGCS01-0018FDP-xxxx-xxx	1.45-2.20	≤ 1.05	0.2-2000	FDP	FDP
WGCS01-0022FDP-xxxx-xxx	1.72-2.61	≤ 1.05	0.1-2000	FDP	FDP
WGCS01-0026FDP-xxxx-xxx	2.17-3.30	≤ 1.05	0.1-2000	FDP	FDP
WGCS01-0032FDP-xxxx-xxx	2.60-3.95	≤ 1.05	0.1-2000	FDP	FDP
WGCS01-0040FDP-xxxx-xxx	3.22-4.90	≤ 1.05	0.1-2000	FDP	FDP
WGCS01-0048FDP-xxxx-xxx	3.94-5.99	≤ 1.05	0.1-2000	FDP	FDP
WGCS01-0058FDP-xxxx-xxx	4.64-7.05	≤ 1.05	0.1-2000	FDP	FDP
WGCS01-0070FDP-xxxx-xxx	5.38-8.17	≤ 1.10	0.1-2000	FDP	FDP
WGCS01-0084FBP-xxxx-xxx	6.57-9.99	≤ 1.10	0.1-2000	FDP	FDP
WGCS01-0100FBP-xxxx-xxx	8.20-12.5	≤ 1.10	0.1-2000	FBP	FBP
WGCS01-0120FBP-xxxx-xxx	9.84-15.0	≤ 1.10	0.1-2000	FBP	FBP
WGCS01-0140FBP-xxxx-xxx	11.9-18.0	≤ 1.10	0.1-1000	FBP	FBP
WGCS01-0180FBP-xxxx-xxx	14.5-22.0	≤ 1.10	0.1-1000	FBP	FBP
WGCS01-0220FBP-xxxx-xxx	17.6-26.7	≤ 1.10	0.1-600	FBP	FBP
WGCS01-0260FBP-xxxx-xxx	21.7-33.0	≤ 1.10	0.1-600	FBP	FBP
WGCS01-0320FBP-xxxx-xxx	26.3-40.0	≤ 1.10	0.1-500	FBP	FBP
WGCS01-0400FUGP-xxxx-xxx	32.9-50.0	≤ 1.15	0.1-300	FUGP	FUGP
WGCS01-0500FUGP-xxxx-xxx	39.2-59.6	≤ 1.15	0.1-300	FUGP	FUGP
WGCS01-0620FUGP-xxxx-xxx	49.8-75.8	≤ 1.15	0.1-300	FUGP	FUGP
WGCS01-0740FUGP-xxxx-xxx	60.5-91.9	≤ 1.15	0.1-300	FUGP	FUGP
WGCS01-0900FUGP-xxxx-xxx	73.8-112	≤ 1.15	0.1-300	FUGP	FUGP

波导材质、法兰、长度均可定制，欢迎联系咨询!!!